



CHARIOT



**RATED
CAPACITY**

UP TO
350 LBS

**12 VOLT
ELECTRIC
POWER
SYSTEM**

**MAX SPEED
FORWARD
UP TO**

**9
MPH**

Shown With Options

Columbia's Chariot is designed to move key personnel around your facility quickly, quietly and efficiently. With PURE ELECTRIC power and an overall width that will fit through most standard doorways, Columbia's Chariot will take you everywhere you need to go!

The Chariot moves 3X faster than normal walking speed, allowing you to cover more ground in less time! Plus, with low center of gravity and increased visibility of stand-up operation, the Chariot is the safest way to move around any indoor or outdoor space.



OPTIONS

- 1 Strobe Light
- 2 Custom Branding




columbiavehicles.com



Dimensions

Step Height:	5.25 in / 13.34 cm
Load Bed Height:	24 in / 60.96 cm
Ground Clearance:	2.5 in / 6.35 cm

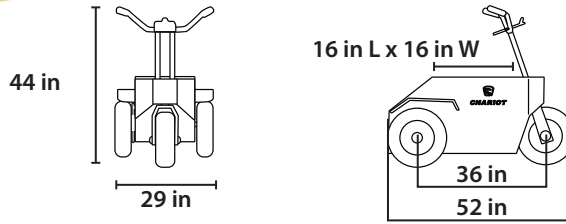

Performance

12 Volt

Max Speed Forward:	9 mph
Turning Radius:	Curb to curb - 79 in / 200.66 cm Intersecting aisle - 41 in / 104.14 cm
Range:	Up to 35 miles / 56.33 km

Weight & Capacity

Vehicle Weight:	366 lb / 166.02 kg
Rated Capacity:	350 lb / 158.76 kg
Towing Capacity:	N/A

Power Train

Motor:	12-Volt DC, series wound, solid copper windings, class H insulation
Horsepower:	0.7 hp / 0.51 kW @ 750 RPM
Batteries:	Two, 6-volt, 232 amp hour, 122 minute, deep cycle
Charger:	Built-in, micro-processor controlled, fully sealed, 100-240 VAC, 50/60 Hz
Controller Type:	3-speed, slide-bar switch DC
Controller Rating:	N/A
Motor Braking Mode:	N/A
Directional Control:	Integrated with power control switch
Drive Unit/Differential:	Heavy-duty chain to drive wheel, 7.4:1 final drive ratio

Body

Passenger Capacity:	One
Seating:	Stand-up operation
Body:	14-gauge powder coated structural steel smooth plate body
Lighting:	Optional LED headlight
Accessories:	Horn; shin guard; handlebar steering; composite deck board with high-density polyethylene overlay battery discharge indicator, reverse warning alarm, clipboard

Chassis

Frame:	Heavy-duty welded steel chassis
Steering:	Handle bar to front fork
Brakes:	4.5 in / 11.43 cm mechanical drum on drive wheel, automatically engaged upon dismount
Suspension:	Rigidly mounted
Tires:	4.80 in x 8 in / 12.19 cm x 20.32 cm, pneumatic, 4-ply rated, load range B



BUILT FOR WORK. BACKED FOR LIFE.

No matter the job, there's a Columbia vehicle ready to take it on. Visit columbiavehicles.com to explore our full line or request a Ride & Decide today.



RIDE & DECIDE



FIND YOUR DEALER

Columbia Vehicle Group, Inc. | 2063 University Parkway, Aiken, SC 29801 | 800.222.4653 | columbiavehicles.com

©2026 Columbia Vehicle Group, Inc. LSVs are designed to comply with the United States National Highway Transportation and Safety Administration's Low Speed Vehicle rules and regulations. Operation of these vehicles is subject to all applicable state and local laws, which may limit or prohibit their lawful operation in certain environments. Do not operate these vehicles without a valid and appropriate state-issued driver's license. Inquire with the relevant authorities before attempting to operate these vehicles on roadways or in closed communities. Do not operate these vehicles in violation of applicable law, contrary to the instructions or recommendations contained in the Owner's Manual or in a manner that impedes traffic. Columbia Vehicle Group, Inc. assumes no responsibilities for any inaccuracies, opinions or omissions in this publication. All pricing, colors, specifications and features are subject to change without notice and Columbia Vehicle Group, Inc. assumes no responsibility for any such changes. Consult your authorized Columbia Vehicle Group dealer for current standard features and options. All trademarks are property of their respective owners.

COL000003 Rev 03-06-2026

