






Dimensions		Power Train	
Width:	53.5 in / 135.89 cm	Motor:	48-Volt, AC Induction, NEMA class H temperature rated
Step Height:	13 in / 33.02 cm	Batteries:	Six, 8-volt
Ground Clearance:	4 in / 10.16 cm	Controller Rating:	450 amp high performance AC controller
Performance		Chassis	
Max Speed:	25 mph	Brakes:	Four-wheel hydraulic, vented front discs, rear drums, auto-adjusting, automatic parking brake
Range:	Up to 40 miles / 64.37 km	Suspension:	Front - Double A-arm with independent coil springs over shock absorbers Rear - Independent coil springs over shock absorbers w/anti-roll sway bar
		Tires:	205/50-10 DOT rated tires

Body		Accessories:	
Passenger Capacity:	2 / 4 (4X and 4+2)	Horn; battery discharge indicator, speedometer, odometer, uniquely keyed keyswitch, high/low speed switch, cup holders, driver & passenger side storage pockets, suntop, DOT safety glass windshield, rear & side view mirrors, front bumper, 12V power outlet, USB charging port, DC/DC converter, backup camera	
Seating, Front:	2		
Seating Rear:	0 / 2 (4X and 4+2)		
Safety:	Charger anti-driveaway interlock, horn, reverse warning alarm, reflectors, 3-pt retractable seat belts, backup camera, pedestrian alert		
Lighting:	Dual LED high/low beam headlights, taillights, brake lights, self-canceling turn signals, emergency flashers, dome light		

 2XL 2 Passengers	 4X 4 Passengers	 4+2 6 Passengers
Length: 131 in / 332.74 cm	Length: 136 in / 345.44 cm	Length: 140 in / 355.60 cm
Wheel Base: 96 in / 243.84 cm	Wheel Base: 96 in / 243.84 cm	Wheel Base: 96 in / 243.84 cm
Turning Radius: 304 in / 772.16 cm	Turning Radius: 304 in / 772.16 cm	Turning Radius: 304 in / 772.16 cm
GVWR: 2,500 lb / 1133.98 kg	GVWR: 2,500 lb / 1133.98 kg	GVWR: 2,500 lb / 1133.98 kg
Vehicle Weight: 1,500 lb / 680.39 kg	Vehicle Weight: 1,500 lb / 680.39 kg	Vehicle Weight: 1,550 lb / 703.07 kg




BUILT FOR WORK. BACKED FOR LIFE.

No matter the job, there's a Columbia vehicle ready to take it on. Visit columbiavehicles.com to explore our full line or request a Ride & Decide today.



Columbia's Journeyman series is Built For Work. These multi-use vehicles are perfect for all-day use and include features to improve fleet productivity. Whether you need vehicles for maintenance, higher education, hospitality, construction, or shuttling, the Journeyman can easily switch from task to task without slowing you down! When you need to do it all, have a Journeyman at your side.

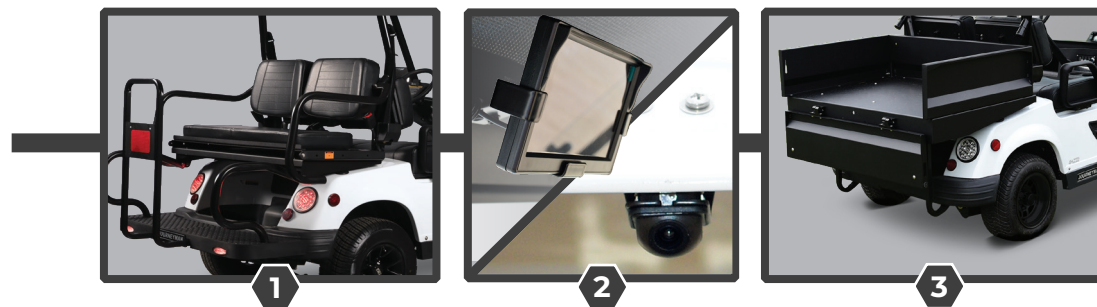

STANDARD

- 1 Rear Facing Seat on 2+2 and 4+2
- 2 Back-up Camera (LSV only)
- 3 Cargo Box with Drop Sides on 2X and 4X



columbiavehicles.com

Columbia Vehicle Group, Inc. | 2063 University Parkway, Aiken, SC 29801 | 800.222.4653 | columbiavehicles.com

©2026 Columbia Vehicle Group, Inc. LSVs are designed to comply with the United States National Highway Transportation and Safety Administration's Low Speed Vehicle rules and regulations. Operation of these vehicles is subject to all applicable state and local laws, which may limit or prohibit their lawful operation in certain environments. Do not operate these vehicles without a valid and appropriate state-issued driver's license. Inquire with the relevant authorities before attempting to operate these vehicles on roadways or in closed communities. Do not operate these vehicles in violation of applicable law, contrary to the instructions or recommendations contained in the Owner's Manual or in a manner that impedes traffic. Columbia Vehicle Group, Inc. assumes no responsibilities for any inaccuracies, opinions or omissions in this publication. All pricing, colors, specifications and features are subject to change without notice and Columbia Vehicle Group, Inc. assumes no responsibility for any such changes. Consult your authorized Columbia Vehicle Group dealer for current standard features and options. All trademarks are property of their respective owners.

COL000006 Rev 03-06-2026



JOURNEYMAN



JOURNEYMAN



Dimensions

Width :	53.5 in / 135.89 cm
Step Height:	13 in / 33.02 cm
Ground Clearance:	4 in / 10.16 cm

Power Train

Motor:	48-Volt, AC Induction, NEMA class H temperature rated
Batteries:	Six, 8-volt
Controller Rating:	450 amp high performance AC controller

Performance

Max Speed:	19 mph
Range:	Up to 40 miles / 64.37 km


Chassis

Brakes:	Four-wheel hydraulic, vented front discs, rear drums, auto-adjusting, automatic parking brake
Suspension:	Front - Double A-arm with independent coil springs over shock absorbers; Rear - Independent coil springs over shock absorbers with panhard bar
Tires:	205/50-10 DOT rated tires

Body


Passenger Capacity:	2 / 4 (4X and 4+2)
Seating, Front:	2
Seating Rear:	0 / 2 (4X and 4+2)
Safety:	Charger anti-driveaway interlock, horn, reverse warning alarm, reflectors, 3-pt retractable seat belts
Lighting:	Dual LED high/low beam headlights, taillights, brake lights, self-canceling turn signals, emergency flashers, dome light

Accessories:	Horn; battery discharge indicator, speedometer, odometer, uniquely keyed keyswitch, high/low speed switch, cup holders, driver & passenger side storage pockets, suntop, DOT safety glass windshield, rear & side view mirrors, front bumper, 12V power outlet, USB charging port, DC/DC converter
--------------	--




2X | 2 Passengers

Length:	104 in / 264.16 cm
Wheel Base:	64 in / 162.56 cm
Turning Radius:	219 in / 556.26 cm
Rated Capacity:	800 lb / 362.87 kg
Vehicle Weight:	1,300 lb / 589.67 kg

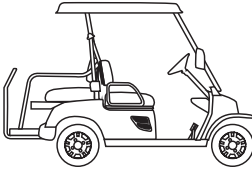


2+2 | 4 Passengers

Length:	108 in / 274.32 cm
Wheel Base:	64 in / 162.56 cm
Turning Radius:	219 in / 556.26 cm
Rated Capacity:	800 lb / 362.87 kg
Vehicle Weight:	1,350 lb / 612.35 kg

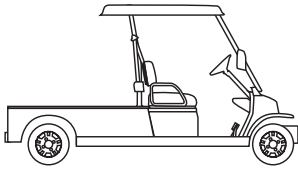


2XL | 2 Passengers

Length:	131 in / 332.74 cm
Wheel Base:	96 in / 243.84 cm
Turning Radius:	304 in / 772.16 cm
Rated Capacity:	1,100 lb / 498.95 kg
Vehicle Weight:	1,500 lb / 680.39 kg

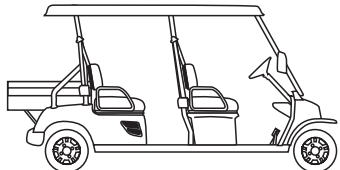


4X | 4 Passengers

Length:	136 in / 345.44 cm
Wheel Base:	96 in / 243.84 cm
Turning Radius:	304 in / 772.16 cm
Rated Capacity:	1,100 lb / 498.95 kg
Vehicle Weight:	1,500 lb / 680.39 kg

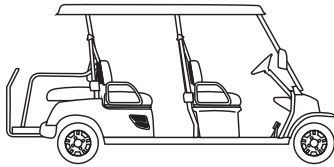


4+2 | 6 Passengers

Length:	140 in / 355.60 cm
Wheel Base:	96 in / 243.84 cm
Turning Radius:	304 in / 772.16 cm
Rated Capacity:	1,100 lb / 498.95 kg
Vehicle Weight:	1,550 lb / 703.07 kg

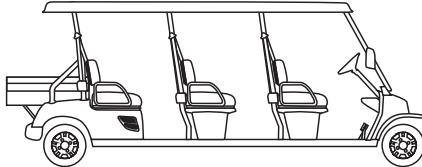

6X | 6 Passengers

Length:	164 in / 416.56 cm
Wheel Base:	124 in / 314.96 cm
Turning Radius:	unknown
Rated Capacity:	1,300 lb / 589.67 kg
Vehicle Weight:	1,850 lb / 839.15 kg

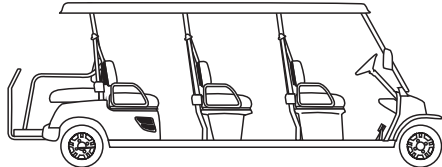

6+2 | 8 Passengers

Length:	168 in / 426.72 cm
Wheel Base:	124 in / 314.96 cm
Turning Radius:	unknown
Rated Capacity:	1,300 lb / 589.67 kg
Vehicle Weight:	1,900 lb / 861.83 kg