



STOCKCHASER



Shown With Options

TOW
UP TO
6,000 LBs

48 VOLT
ELECTRIC
POWER
SYSTEM

MAX SPEED
FORWARD
UP TO

9
MPH

RATED
CAPACITY

UP TO
1,200 LBs

Columbia's Stockchaser is the way to move heavy loads in tight spaces. With a deck capacity of up to 1,200 lbs., you'll be hard-pressed to need to move more cargo than this compact performer can transport with ease.

An optional 48V package increases the Stockchaser's towing capacity to 6,000 lbs., making it the perfect vehicle to transport heavy loads in narrow spaces.

The adjustable backrest and stand-up operation provide a safe and comfortable position for the driver, and the Stockchaser's tubular steel chassis and steel body panels make it as rugged as it is maneuverable! With its standard dual-tire front fork, Columbia's Stockchaser is the most stable, narrow aisle burden carrier available on the market today.



1



2



3

OPTIONS

- 1 Optional 4 or 6 Step Ladder
- 2 Transport Package
- 3 Adjustable Back Seat (Standard)




columbiavehicles.com



STOCKCHASER

Dimensions

Step Height:	6 in / 15.24 cm
Load Bed Height:	24 in / 60.96 cm
Ground Clearance:	3.5 in / 8.89 cm

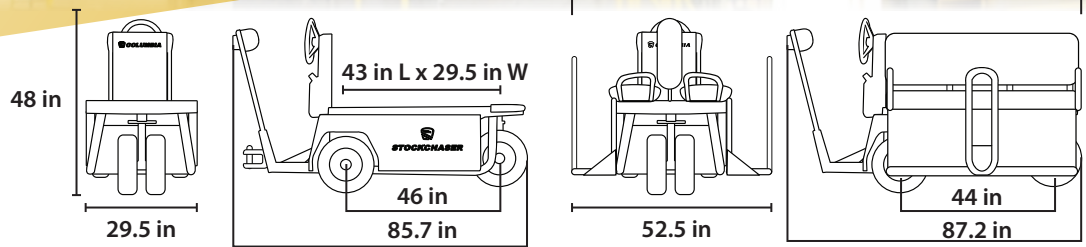

Performance

24 Volt

48 Volt

Max Speed Forward:	9 mph
Turning Radius:	Curb to curb - 133 in / 337.82 cm
Range:	Up to 20 miles / 32.19 km

Weight & Capacity

Vehicle Weight:	830 lb / 376.48 kg
Rated Capacity:	Up to 1,200 lb / 544.31 kg
Towing Capacity:	Up to 2,000 lb / 907.18 kg

Power Train

Motor:	Separately excited DC, Optional: 3.3 kW AC
Horsepower:	5.2 hp / 3.82 kW @ 875 RPM
Batteries:	Four, 6-volt, 232 amp hour, 122 minute, deep cycle
Charger:	Built-in, micro-processor controlled, fully sealed, global, 110 - 240 VAC, 50/60 HZ
Controller Type:	Programmable, solid state, reduced speed reverse with diagnostic LED & calibrator interface
Controller Rating:	400 amp DC Optional: 400 amp AC
Motor Braking Mode:	Regenerative and pedal proportional braking with top speed limiting
Directional Control:	Fully electronic direction switching with console mounted selector switch
Drive Unit/Differential:	Automotive style, helical gears in oil bath, direct to motor, 16.99:1 final drive ratio

Body

Passenger Capacity:	One (Optional Transport Express Package: Up to seven)
Seating:	Stand-up operation; adjustable padded back rest
Body:	14-gauge powder coated structural steel smooth plate body
Lighting:	Optional - LED head, tail & brake light with tail light guard
Accessories:	Horn; battery discharge indicator; reverse warning alarm; composite deck board with high-density polyethylene overlay

Chassis

Frame:	Heavy-duty welded steel chassis with 14-gauge structural steel smooth body
Steering:	Dual front fork, direct link mechanical steering wheel
Brakes:	Dual mechanical rear drum, automatically engaged upon dismount
Suspension:	Rigidly mounted
Tires:	4.80 in X 8 in / 12.19 cm x 20.32 cm, pneumatic, 4-ply rated, load range B



BUILT FOR WORK. BACKED FOR LIFE.

No matter the job, there's a Columbia vehicle ready to take it on. Visit columbiavehicles.com to explore our full line or request a Ride & Decide today.



RIDE & DECIDE



FIND YOUR DEALER



Columbia Vehicle Group, Inc. | 2063 University Parkway, Aiken, SC 29801 | 800.222.4653 | columbiavehicles.com

©2026 Columbia Vehicle Group, Inc. LSVs are designed to comply with the United States National Highway Transportation and Safety Administration's Low Speed Vehicle rules and regulations. Operation of these vehicles is subject to all applicable state and local laws, which may limit or prohibit their lawful operation in certain environments. Do not operate these vehicles without a valid and appropriate state-issued driver's license. Inquire with the relevant authorities before attempting to operate these vehicles on roadways or in closed communities. Do not operate these vehicles in violation of applicable law, contrary to the instructions or recommendations contained in the Owner's Manual or in a manner that impedes traffic. Columbia Vehicle Group, Inc. assumes no responsibilities for any inaccuracies, opinions or omissions in this publication. All pricing, colors, specifications and features are subject to change without notice and Columbia Vehicle Group, Inc. assumes no responsibility for any such changes. Consult your authorized Columbia Vehicle Group dealer for current standard features and options. All trademarks are property of their respective owners.

COL000010 Rev 03-06-2026